



SIGNAGE FABRICATION AND INSTALLATION PROPOSAL

EARTH BURGER HOUSTON

Fabrication, permitting coordination, engineering allowance, and installation for the complete Houston signage package.

PROJECT SITE 4640 Scott Street, Houston, TX 77004	PREPARED FOR Sinelli Concepts International
PREPARED BY Houston Sign Crafters	PROPOSAL DATE September 2, 2026
VALID THROUGH September 17, 2026	SCOPE BASIS Ten-sheet signage package dated June 30, 2026

TOTAL PROJECT INVESTMENT

\$55,000

before applicable sales tax

Deposit with agreement: **\$27,500**

Final payment upon installation: **\$27,500**

3 illuminated exterior identity signs · 2 drive-thru structures · 3 interior elements

EARTH BURGER #20001

PROJECT SUMMARY

Houston Sign Crafters proposes to coordinate, fabricate, permit, and install the complete signage package for Earth Burger #20001 at 4640 Scott Street in Houston. The scope is based on the ten-sheet signage drawing package dated June 30, 2026 and includes three illuminated exterior identity signs, drive-thru signage, wayfinding, a wall stencil, and three interior sign elements.

Our objective is to deliver the Houston location within the requested opening window while providing Sinelli Concepts with one local point of accountability for field verification, permitting coordination, fabrication, installation, and warranty support.

THE EARTH BURGER PROTOTYPE

Earth Burger brand prototype rendering. Site-specific dimensions and placements follow the supplied June 30, 2026 drawing package and field verification.

ONE PACKAGE / TWELVE PRICED COMPONENTS

SCOPE + INVESTMENT

Every proposed sign and project allowance is shown below. Pricing is based on the complete package and the supplied drawings.

EXTERIOR IDENTITY	\$20,400
East illuminated logo	\$5,400
Approx. 8'-4 1/4" W x 6'-2 3/4" H face-and halo-illuminated logo assembly with painted aluminum backer.	
South illuminated logo	\$4,850
Approx. 6'-10 3/8" W x 4'-1" H face-and halo-illuminated logo assembly with painted aluminum backer and survey-dependent bracket system.	
North illuminated logo	\$9,400
Approx. 16'-8 1/4" W x 3'-10" H face-and halo-illuminated logo assembly with painted aluminum backer and survey-dependent bracket system.	
South wall stencil	\$750
Approx. 7'-8 1/4" W x 6'-10 3/8" H stencil production and application; final paint by GC.	
DRIVE-THRU AND WAYFINDING	\$14,750
Drive-thru canopy structure	\$11,500
Fabricated drive-thru canopy with illuminated Earth Burger logo, Order Here copy, clearance copy, and steel/aluminum support structure.	
Drive-thru wayfinding fixture	\$3,250
Approx. 54" W x 79" H painted aluminum wayfinding fixture with 48" panel, dimensional copy, arrow, and support posts.	
INTERIOR SIGNAGE	\$4,275
Interior Veggie Joint letters	\$1,025
Approx. 6'-5 5/8" W x 7 1/2" H white Sintra letters, flush mounted.	
Interior round 100% sign	\$1,325
Approx. 39" diameter painted ACM panel with dimensional Sintra copy and stud-mounted pads.	
Entrance mixed-material sign	\$1,925
Approx. 3'-7 1/4" W x 2'-7 1/2" H layered Sintra, turf, painted copy, and laminated vinyl sign.	
PROJECT DELIVERY AND ALLOWANCES	\$15,575
Installation (all signage)	\$11,975
Installation of every sign element in this proposal, including the drive-thru canopy structure, by the HSC crew: equipment, mounting, wiring connections at the sign, and site cleanup.	
Permit allowance (4 exterior signs)	\$2,000
City of Houston requires a separate sign permit for each exterior sign. Allowance of \$500 per sign for the four permitted exterior signs, including preparation, submission, and coordination.	
Engineering allowance	\$1,600
Structural engineering allowance for the proposed scope.	

TOTAL PROJECT INVESTMENT

\$55,000

Applicable sales tax is not included

Deposit with agreement: **\$27,500**
Final payment upon installation: **\$27,500**

Package pricing may require revision if individual components are removed or materially changed.

A PRACTICAL PATH TO INSTALLATION

HOW THE PROJECT MOVES

The sequence is built around Earth Burger's requested 90-day opening window. Agency review, approvals, and site readiness remain schedule dependencies.

- 1 Authorize.** Execute the agreement and submit the 50% deposit.
- 2 Verify.** Field survey and final dimensions, approximately 2-3 business days after site access.
- 3 Engineer and permit.** Prepare required documents and submit after verified drawings. Review timing is controlled by third parties.
- 4 Fabricate.** Approximately 4-6 weeks after final artwork, engineering, and permit approvals.
- 5 Install.** Approximately 2-4 working days after fabrication, site readiness, and scheduling confirmation.



Earth Burger brand prototype at dusk: the illuminated identity this package delivers.

WHAT WE NEED FROM YOUR TEAM


- Final brand, artwork, landlord, and construction approvals
- Property and construction documents requested by permitting authorities
- Primary 120V circuits at each sign location
- Safe and unobstructed site access
- Drive-thru concrete base, anchor bolts, and J-hooks identified in the supplied drawing
- Final paint application for the south wall stencil

WORK YOU CAN DRIVE PAST

Recent Houston Sign Crafters installs by the same crew proposed for this project, including face- and halo-illuminated work.



Copper Espresso Bar · Illuminated Channel Letters

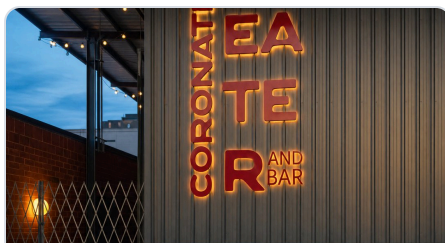

Coronation Theater and Bar · Halo-Lit Channel Letters



Luce Avenue Coffee · Halo-Lit Letters & Logo

ONE DECISION / ONE NEXT STEP

READY TO AUTHORIZE

The package gives Sinelli Concepts one Houston-based partner for field verification, fabrication, installation, and project closeout.

HOUSTON SIGN CRAFTERS INCLUDES

- Field verification and project coordination
- Listed fabrication and installation scope
- Standard permit and engineering coordination
- Installation scheduling and closeout
- Five-year limited warranty on qualifying HSC-fabricated electrical signage

COMMERCIAL SUMMARY

- \$55,000 total before applicable sales tax
- \$27,500 due with the agreement
- \$27,500 due upon installation
- Proposal valid through September 17, 2026

IMPORTANT CONDITIONS

1. Permit or engineering costs above the stated allowances require written approval.
2. Final dimensions and attachment methods remain subject to field verification.
3. Concealed conditions, inadequate structure, unavailable electrical service, underground conflicts, scope changes, remobilization, storage, and after-hours work are excluded unless authorized.
4. Changes may affect both price and schedule.
5. The final fabrication and installation agreement controls if it conflicts with this proposal.

NEXT STEP

Reply to this proposal or email sales@houstoncrafter.com to request the final agreement and deposit invoice. We will then coordinate the field survey and confirm the permitting and production schedule. Direct line: **(832) 974-2546**.

Prepared and submitted by

Rameel Sheikh

Owner, Houston Sign Crafters · September 2, 2026